

Electrical network management

Schneider Electric

ION8650 Technical Datasheet



Life Is On



ION8650

Functions and characteristics

PB107500



PowerLogic ION8650 socket meter

Used to monitor electric energy provider networks, service entrances and substations, PowerLogic ION8650 meters are ideal for independent power producers and cogeneration applications that need to accurately measure energy bi-directionally in both generation and stand-by modes. These meters give utilities the tools to manage complex energy supply contracts that include commitments to power quality. Integrate them with our StruxureWare Power Monitoring (ION Enterprise™) operations software or other energy management and SCADA systems through multiple communication channels and protocols, including Itron MV-90, Modbus, DNP, DLMS, IEC 61850 Ed. 2.

Applications

- Revenue metering.
- Co-generation and IPP monitoring.
- Compliance monitoring.
- Power quality analysis.
- Demand and power factor control.
- Load curtailment.
- Equipment monitoring and control.
- Energy pulsing and totalisation.
- Instrument transformer correction.

Main characteristics

ANSI Class 0.2 and IEC 62053-22/23 Class 0.2 S metering

For interconnection points on medium, high, and ultra-high voltage networks; twice as accurate as current IEC and ANSI Class 0.2 standards over all conditions and including single wide range current measurement.

Power quality compliance monitoring

Monitor compliance with international quality-of-supply standards (IEC 61000-4-30 Class A/S, EN 50160 Ed. 4, IEC 61000-4-7, IEC 61000-4-15, IEEE 1159, IEEE 519). Also detects disturbance direction.

Digital fault recording

Simultaneous capture of voltage and current channels for sub-cycle disturbance.

Complete communications

Multi-port, multi-protocol ports including serial, infrared, modem and ethernet. Simultaneously supports multiple industry standard protocols including: Itron MV-90, Modbus, Modbus Master, DLMS, DNP 3.0 and IEC 61850 Ed. 2.

Multiple tariffs and time-of-use

Apply tariffs, seasonal rate schedules to measure energy and demand values for time periods with specific billing requirements.

Multiple setpoints for alarm and functions

Use up to 65 setpoints for single/multi-condition alarms and I/O functions with response times down to 1/2 cycle.

Multiple setpoints for alarm and functions

Use up to 65 setpoints.

Instrument transformer correction

Save money and improve accuracy by correcting for less accurate transformers.

Alarm notification via email

High-priority alarms, data logs sent directly to the user's PC. Instant notification of power quality events by email.

Cyber security enhancements

Assign communication admin rights to selected user; prevention measures ensure no loss of security logs; support syslog for external security.

ION8650

Functions and characteristics (cont.)


PE6602-95



PowerLogic ION8650 switchboard meter.

- 1 Terminals
- 2 Optical port
- 3 Main display status bar
- 4 Watt LED
- 5 Navigation, ALT/Enter buttons
- 6 VAR LED
- 7 Nameplate label
- 8 Demand reset switch

PE6602

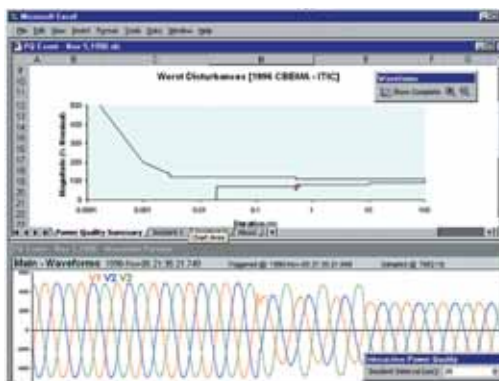


Disturbance waveform capture and power quality report

| Selection guide | | ION8650 A | ION8650 B | ION8650 C |
|--|----------------------|-----------|-----------|-----------|
| General | | | | |
| Use on LV, MV and HV systems | | ■ | ■ | ■ |
| Current accuracy | | 0.1 % | 0.1 % | 0.1 % |
| Voltage accuracy | | 0.1 % | 0.1 % | 0.1 % |
| Power accuracy | | 0.1 % | 0.1 % | 0.1 % |
| Samples/cycle | | 1024 | 1024 | 1024 |
| Instantaneous values | | | | |
| Current, voltage, frequency | | ■ | ■ | ■ |
| Active, reactive, apparent power | Total & per phase | ■ | ■ | ■ |
| Power factor | Total & per phase | ■ | ■ | ■ |
| Current measurement range | | 0 A- 20 A | 0 A- 20 A | 0 A- 20 A |
| Energy values | | | | |
| Active, reactive, apparent energy | | ■ | ■ | ■ |
| Settable accumulation modes | | ■ | ■ | ■ |
| Demand values | | | | |
| Current | Present & max values | ■ | ■ | ■ |
| Active, reactive, apparent power | Present & max values | ■ | ■ | ■ |
| Predicted active, reactive, apparent power | | ■ | ■ | ■ |
| Synchronisation of the measurement window | | ■ | ■ | ■ |
| Demand modes: Block (sliding), thermal (exponential) | | ■ | ■ | ■ |
| Power quality measurements | | | | |
| Harmonic distortion | Current & voltage | ■ | ■ | ■ |
| Individual harmonics | Via front panel | 63 | 63 | 31 |
| Waveform / transient capture | | ■ / ■ | - / ■ | - / - |
| Harmonics: magnitude, phase, and interharmonics | | 50 | 40 | - |
| Detection of voltage sags and swells | | ■ | ■ | ■ |
| IEC 61000-4-30 class A/S | | A | S | - |
| IEC 61000-4-15 (Flicker) | | ■ | ■ | - |
| High speed data recording (down to 10 ms) | | ■ | ■ | - |
| EN 50160 compliance reporting | | ■ | ■ | - |
| Programmable (logic and math functions) | | ■ | ■ | ■ |
| Data recording | | | | |
| Onboard Memory (in Mbytes) | | 128 | 64 | 32 |
| Revenue logs | | ■ | ■ | ■ |
| Event logs | | ■ | ■ | ■ |
| Historical logs | | ■ | ■ | ■ |
| Harmonics logs | | ■ | ■ | ■ |
| Sag/swell logs | | ■ | ■ | ■ |
| Transient logs | | ■ | - | - |
| Time stamping to 1 ms | | ■ | ■ | ■ |
| GPS synchronisation (IRIG-B standard) | | ■ | ■ | ■ |
| Display and I/O | | | | |
| Front panel display | | ■ | ■ | ■ |
| Wiring self-test (requires PowerLogic ION Setup) | | ■ | ■ | ■ |
| Pulse output (front panel LED) | | 2 | 2 | 2 |
| Digital or analogue inputs* (max) | | 11 | 11 | 11 |
| Digital or analogue outputs* (max, including pulse output) | | 16 | 16 | 16 |
| Communication | | | | |
| Infrared port | | 1 | 1 | 1 |
| RS-485 / RS-232 port | | 1 | 1 | 1*** |
| RS-485 port | | 1 | 1 | 1*** |
| Ethernet port (Modbus/TCP/IP protocol) with gateway | | 1 | 1 | 1*** |
| Internal modem with gateway (ModemGate) | | 1 | 1 | 1*** |
| HTML web page server | | ■ | ■ | ■ |
| IRIG-B port (unmodulated IRIG B00x time format) | | 1 | 1 | 1 |
| Modbus TCP Master / Slave (Ethernet port) | | ■ / ■ | ■ / ■ | - / ■ |
| Modbus RTU Master / Slave (Serial ports) | | ■ / ■ | ■ / ■ | - / ■ |
| DNP 3.0 through serial, modem, and I/R ports | | ■ | ■ | ■ |


* With optional I/O Expander.

** For 9S, and 36S only. For 35S system up to 480 V L-L.

*** C model limited to IR + 2 other ports at one time. Ports can be enabled/disabled by user.

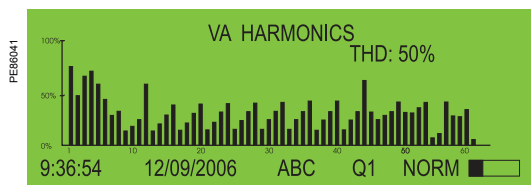

PowerLogic ION8650 front panel harmonic display.

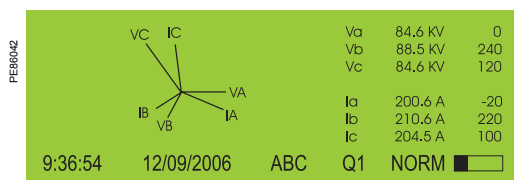

ION8650 front panel phasor display and table.

Electrical characteristics

| | | |
|--------------------------------|--|---|
| Type of measurement | True rms 1024 samples per cycle | |
| Measurement accuracy | Current and voltage | 0.1 % Reading |
| | Power | 0.1 % |
| | Frequency | ±0.001 Hz |
| | Power factor | 0.1 % |
| | Energy | 0.1 %, twice as accurate as ANSI Class 0.2 and IEC 62053-22/23 (0,2S) |
| Data update rate | 0.5 cycle or 1 second (depending on value) | |
| Input-voltage characteristics* | Nominal voltage | 57 V to 277 V L-N rms 100 V to 480 V L-L rms (35S) |
| | Maximum voltage | 347 V L-N rms, 600 V L-L rms (9S) |
| | Impedance | 5 MΩ /phase (phase-Vref/Ground) |
| | Inputs | V1, V2, V3, VREF |
| Input-current characteristics | Rated nominal/current class | 1A, 2 A, 5 A and/or 10 A (Class 1/2/10/20) |
| | Accuracy range | 0.01 - 20 A (standard range) |
| | Measurement range | 0.001 - 24 A |
| | Permissible overload | 500 A rms for 1 second, non-recurring |
| | Burden per phase | Socket: 0.05 VA at 5 A (0.002 Ω max) Switchboard: 0.05 VA at 1 A (0.05 Ω max) |
| Power supply | Standard power supply, blade powered | 120-277 V L-N RMS (-15 %/+20 %) 47-63 Hz or 120-480 V L-L RMS (-15 %/+20 %) 47-63 Hz (35S) |
| | Auxiliary powered low voltage | AC: 65-120 (+/- 15 %) VLN RMS, 47-63 Hz DC: 80-160 (+/- 20 %) VDC |
| | Auxiliary powered high voltage | AC: 160-277 (+/- 20 %) V L-N RMS, 47-63 Hz DC: 200-300 (+/- 20 %) V DC |
| | Ride-through time, (Standard power supply) | Socket: min guaranteed: 6 cycles at nominal frequency (minimum 50 Hz), at 120 V L-N rms (208 V L-L rms) 3-phase operation Switchboard: min guaranteed: 6 cycles at nominal frequency (minimum 50 Hz), at 120 V L-N rms (208 V L-L rms) 3-phase operation |
| Input/outputs** | Digital outputs | 4 (Form C) Solid state relays (130 V AC/ 200 V DC) 50 mA AC/DC, 1 (Form A) output |
| | Digital inputs | upto 3 Self-excited, dry contact sensing inputs |

Mechanical characteristics

| | | |
|-------------------------|-------------|-----------------------|
| Weight | 7.0 kg | |
| IP degree of protection | Socket | Front IP65, back IP51 |
| | Switchboard | Front IP50, back IP30 |
| Dimensions | Socket | 178 x 237 mm |
| | Switchboard | 285 x 228 x 163 mm |

Environmental conditions

| | |
|-------------------------|-------------------------------|
| Operating temperature | -40 °C to 85 °C |
| Display operating range | -40 °C to 70 °C |
| Storage temperature | -40 °C to 85 °C |
| Humidity rating | 5 % to 95 % RH non-condensing |
| Pollution degree | 2 |
| Installation category | Cat III |
| Dielectric withstand | 2.5 kV |

Electromagnetic compatibility

| | |
|-----------------------------------|--------------------|
| Electrostatic discharge | IEC 61000-4-2 |
| Immunity to radiated fields | IEC 61000-4-3 |
| Immunity to fast transients | IEC 61000-4-4 |
| Immunity to surge | IEC 61000-4-5 |
| Immunity conducted | IEC 61000-4-6 |
| Damped oscillatory waves immunity | IEC 61000-4-12 |
| Conducted and radiated emissions | CISPR 22 (class B) |

Safety

| | |
|---------------|---------------------|
| Europe | As per IEC 62052-11 |
| North America | As per ANSI C12.1 |

* Specifications are limited by the operating range of the power supply if a non-aux power supply is used.

** More input and output selections available via optional I/O expander.

ION8650

Functions and characteristics (cont.)




Example embedded webserver page (WebMeter) showing realtime values.

| Communication | |
|--|--|
| RS-232 / RS-485 port (COM1) | User-selectable RS-232 or RS-485. 300 - 115,200 bauds (RS-485 limited to 57,600 bps); protocols: ION, Modbus/RTU/Mastering, DLMS, DNP 3.0, GPSTRUETIME/DATUM. |
| Internal modem port (COM2) | 300-57,600 bps |
| ANSI 12.18 Type II optical port (COM3) | Up to 57,600 bps |
| RS-485 port (COM4) | Up to 57,600 bauds, Modbus, direct connection to a PC or modem |
| Ethernet port | 10/100BASE-T, RJ45 connector, protocols: DNP, ION, Modbus/TCP/Mastering, IEC 61850 Ed. 2 or 100BASE-FX multimode, male ST connectors |
| EtherGate | Up to 31 slave devices via serial ports |
| ModemGate | Up to 31 slave devices |


| Firmware characteristics | |
|---------------------------|---|
| High-speed data recording | Up to 1/2-cycle interval burst recording, stores detailed characteristics of disturbances or outages. Trigger recording by a user-defined setpoint, or from external equipment. |
| Harmonic distortion | Up to 63rd harmonic for all voltage and current inputs |
| Dip/swell detection | Analyse severity/potential impact of sags and swells: - magnitude and duration data suitable for plotting on voltage tolerance curves - per phase triggers for waveform recording or control operations |
| Instantaneous | High accuracy measurements with 1s or 1/2 cycle update rate for: - voltage and current - active power (kW) and reactive power (kVAR) - apparent power (kVA) - power factor and frequency - voltage and current unbalance - phase reversal |
| Load profiling | Channel assignments are user configurable: - 800 channels via 50 data recorders (feature set A), - 720 channels via 45 data recorders (feature set B), - 80 channels via 5 data recorders (feature set C). Configure for historical trend recording of energy, demand, voltage, current, power quality, other measured parameter. Recorders can trigger on time interval basis, calendar schedule, alarm/event condition, manually. |
| Waveform captures | Simultaneous capture of all voltage and current channels - sub-cycle disturbance capture (16 to 1024 samples/cycle) |
| Alarms | Threshold alarms: - adjustable pickup and dropout setpoints and time delays, numerous activation levels possible for a given type of alarm - user-defined priority levels - boolean combination of alarms |
| Advanced security | Up to 50 users with unique access rights. Perform resets, time syncs, or meter configurations based on user privileges. |
| Transformer correction | Correct for phase / magnitude inaccuracies in current transformers (CTs), potential transformers (PTs) |
| Memory | 128 MB (A), 64 MB (B), 32 MB (C) |
| Firmware update | Update via the communication ports |

| Display characteristics | |
|-------------------------|--------------------------|
| Type | FSTN transreflective LCD |
| Backlight | LED |
| Languages | English |

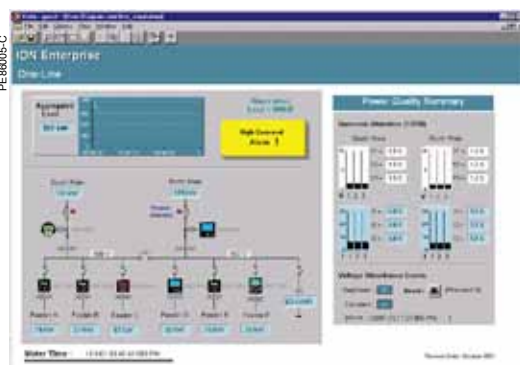

ION8650

Functions and characteristics (cont.)



Example product part number.

- 1 Model.
- 2 Feature set.
- 3 Form factor.
- 4 Current Inputs.
- 5 Voltage inputs.
- 6 Power supply.
- 7 System frequency.
- 8 Communications.
- 9 Input/output options.
- 10 Security.
- 11 Special order options.



PowerLogic ION8650 meter with switchboard case


Commercial reference numbers

| Item | Code | Description |
|--------------------|-------|--|
| 1 Model | M8650 | Schneider Electric energy and power quality meter. |
| 2 Feature Set | A | 128 MB Memory Class A power quality analysis, waveforms and transient capture with 1024 samples/cycle. |
| | B | 64 MB memory, energy meter Class S EN 50160 Ed. 4 power quality monitoring. |
| | C | 32 MB memory, basic tariff/energy metering (5 data recorders, 80 channels). |
| 3 Form Factor (1) | 0 | Form 9S/29S/36S Base, 57-277 V L-N (autoranging) 3-Element, 4-Wire / 2 1/2-Element, 4-Wire |
| | 1 | Form 35S Base - 120-480 V L-L (autoranging) 2-Element, 3-Wire |
| | 4 | Form 9/29/35/36S FT21 Switchboard (meter + case) with break out panel |
| | 7 | Form 9/29/35/36S FT21 Switchboard (meter + case) with break out cable |
| 4 Current Inputs | C | 1, 2 or 5 A nominal, 20 A full scale (24 A fault capture, start at 0.001 A) |
| 5 Voltage Inputs | 0 | Standard (see Form Factor above) |
| 6 Power Supply* | E | Form 9/29/35/36S, (socket) and Form 9, 36 (FT21 switchboard): 120-277 V AC. Form 35S (socket) and Form 35 (FT21 switchboard): 120-480 V AC. Powered from the meter's voltage connections. |
| | H | Auxiliary Power Pigtail: 65-120 V AC or 80-160 V DC (power from external source) |
| | J | Auxiliary Power Pigtail: 160-277 V AC or 200-300 V DC (power from external source) |
| | | |
| 7 System Frequency | 5 | Calibrated for 50 Hz systems. |
| | 6 | Calibrated for 60 Hz systems. |
| 8 Communications | A 0 | Infrared optical port, RS-232/RS-485 port, RS-485 port |
| | C 7 | Infrared optical port, Ethernet (10/100Base-T), RS-232/485 port, RS-485 port (note: in addition to infrared optical port, Feature Set C can use any two ports (configurable)), 56 k universal internal modem (RJ11) |
| | E 1 | Infrared optical port, Ethernet (10/100Base-T), RS 232/485 port, RS-485 port (note: in addition to infrared optical port, Feature Set C can use any two ports (configurable)) |
| | F 1 | Infrared Optical port, Ethernet (100BASE-FX multi-mode) with male ST connectors (available on socket meters only, Forms 0 & 1 above. I/O card not available if this option is ordered.) RS-232/485 port, RS-485 port (Note: in addition to Infrared Optical port Feature Set C can use any two ports (configurable)) |
| | M 1 | Infrared optical port, RS-232/485 port, RS-485 port (note: in addition to infrared optical port, Feature Set C can use any two ports (configurable)), 56 k universal internal modem (RJ11). |
| 9 Onboard I/O | S 0 | Infrared optical port, Ethernet (10 BASE-T), RS-232/485 port, RS-485 port (note: in addition to infrared optical port, Feature Set C can use any two ports (configurable)), Verizon cell modem. |
| | A | None. |
| | B | 4 Form C digital outputs, 3 Form A digital inputs. |
| 10 Security | C | 4 Form C digital outputs, 1 Form A digital output, 1 digital input. |
| | 1 | Password protected no security lock. |
| | 2 | Password protected with security lock enabled |
| | 3 | RMICAN (Measurement Canada approved) |
| | 4 | RMICAN-SEAL (Measurement Canada approved, and factory sealed) |
| 11 Special Order | 7 | Password protected, no security lock(US only) |
| | 8 | Password protected with security lock enabled (US only) |
| | A | None |

*Specifications are limited by the operating range of the power supply if a non-aux power supply is used.

ION8650

Functions and characteristics (cont.)



Example order code. Use this group of codes when ordering the I/O Expander.

- 1 Digital / Analogue I/O.
- 2 I/O option.
- 3 Cable option.



Commercial reference numbers (cont.)

I/O Expander

| | | |
|----------------------|--------------|--|
| Digital/Analogue I/O | P850E | Schneider Electric I/O Expander for ION8600 meters: Inputs and Outputs for energy pulsing, control, energy counting, status monitoring, and analogue interface to SCADA. |
| I/O option | A | External I/O box with 8 digital inputs and 8 digital outputs (4 Form A, 4 Form C) |
| | B | External I/O box with 8 digital inputs and 4 digital outputs (4 Form C) and 4 analogue outputs (0 to 20mA) |
| | C | External I/O box with 8 digital inputs and 4 digital outputs (4 Form C) and 4 analogue outputs (-1mA to 1mA) |
| | D | External I/O box with 8 digital inputs and 4 digital outputs (4 Form C) and 4 analogue outputs (two -1 to 1 mA, and two 0 to 20 mA outputs) |
| Cable option | 0 | No cable - cables for the I/O box are no ordered as a separate part number. Refer to commercial reference numbers: CBL-8X00IOE5FT , CBL-8X00IOE15FT and CBL-8XX0-BOP-IOBOX under Connector cables, below. |

A-base adapters

| | |
|------------------------------|--------------------------|
| Form 9S to Form 9A adapter | A-BASE-ADAPTER-9 |
| Form 35S to Form 35A adapter | A-BASE-ADAPTER-35 |

Optical communication interface

| | |
|---------------------------------|----------------------|
| Optical communication interface | OPTICAL-PROBE |
|---------------------------------|----------------------|

Connector cables

| | |
|--|---------------------------|
| 1.5 m extension cable, mates with 24-pin male Molex connector from the meter to the 24-pin Molex connector on the I/O expander box (not for use with breakout panel E8, F8 & G8 form factors) | CBL-8X00BRKOUT |
| 44.57 m extension cable, mates with 24-pin male Molex connector from the meter to the 24-pin Molex connector on the I/O expander box (not for use with breakout panel E8, F8 & G8 form factors) | CBL-8X00IOE5FT |
| 44.57 m extension cable, mates with 24-pin male Molex connector from the meter to the 24-pin female Molex connector on the I/O Expander box (not for use with breakout panel E8, F8 & G8 form factors) | CBL-8X00IOE15FT |
| 1.8 m connector cable, 24-pin male to 14-pin male Molex connector for connecting an ION8000 Series meter with breakout panel to an I/O Expander Box | CBL-8XX0-BOP-IOBOX |


Commercial reference numbers

| ION8650 meters | Commercial ref. no. |
|---|-------------------------|
| ION8650A | M8650A |
| ION8650B | M8650B |
| ION8650C | M8650C |
| 8650-9/36S SOC-STD-60-ETH 8650 Power Meter | M8650C0C0E6E1A0A |
| 8650-9/36S SOC-ALV-60-ETH-NOIO-RM 8650 Power Meter | M8650B0C0H6E1A1A |
| 8650-9/36S SOC-ALV-50-MDM-DIO 8650 Power Meter | M8650C0C0H5M1B0A |
| 8650-9/36S SOC-ALV-50-SERIAL 8650 Power Meter | M8650C0C0H5A0A0A |
| 8650-9/36S SOC-ALV-60-ETH-1I5O-RMIC 8650 Power Meter | M8650C0C0H6E1C3A |
| 8650-FT21-ALV-60-ETH-NOIO 8650 Power Meter | M8650C7C0H6E1A0A |
| 8650-FT21BOP-ALV-60-FULL-1I5O-RMICAN 8650 Power Meter | M8650A4C0H6C7C3A |
| 8650-9/36S SOC-STD-60-ETH-DIO 8650 Power Meter | M8650C0C0E6E1B0A |
| 8650-FT21-ALV-50-ETH-DIO 8650 Power Meter | M8650C7C0H6E1B0A |
| 8650-9/36S SOC-AUX-50-FULL-DIO 8650 Power Meter | M8650B0C0J5C7B0A |
| 8650-9/36S SOC-STD-60-ETHERNET-DIO 8650 Power Meter | M8650A0C0E6E1B0A |
| 8650-FT21-BOP-ALV-50-ETH-DIO-RM 8650 Power Meter | M8650C4C0H5E1B1A |
| 8650-35S SOC-ALV-60-FULL 8650 Power Meter | M8650C1C0H6C7A0A |
| 8650-FT21 BOP SWB-ALV-50-FULL-DIO 8650 Power Meter | M8650A4C0H5C7B0A |
| 8650-9/36S SOC-ALV-50-ETH-NOIO 8650 Power Meter | M8650A0C0H5E1A0A |
| 8650-FT21-BOP-ALV-60-FULL-1I5O-RMIC 8650 Power Meter | M8650B4C0H6C7C3A |
| 8650-FT21-ALV-60-ETH-NOIO 8650 Power Meter | M8650B7C0H6E1A0W |
| 8650-9/36S SOC-ALV-60-FULL-DIO 8650 Power Meter | M8650A0C0H6C7B0A |
| 8650-9/36S SOC-ALV-60-ETH-RM 8650 Power Meter | M8650A0C0H6E1A1A |
| 8650-FT21-ALV-60-FULL 8650 Power Meter | M8650A7C0H6C7A0A |
| 8650-9/36S SOC-ALV-60-ETH-RM 8650 Power Meter | M8650C0C0H6E1A1A |
| 8650-FT21-BOP-LVAUX-60-ETH 8650 Power Meter | M8650C4C0H6E1A0A |
| 8650-FT21BOP-HVAUX-50-ETH 8650 Power Meter | M8650A4C0J5E1A0A |
| 8650-FT21BOP-ALV-60-ETH-RM 8650 Power Meter | M8650A4C0H6E1A1A |


ION8650

Dimensions and connections


ION8650 socket dimensions

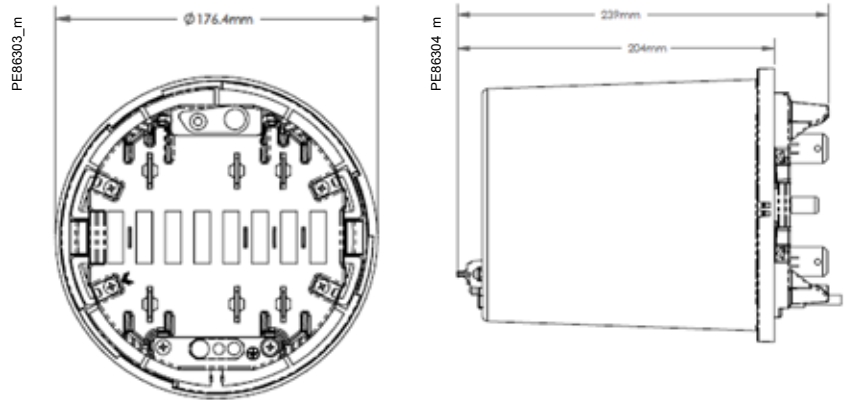

ION8650 switchboard dimensions

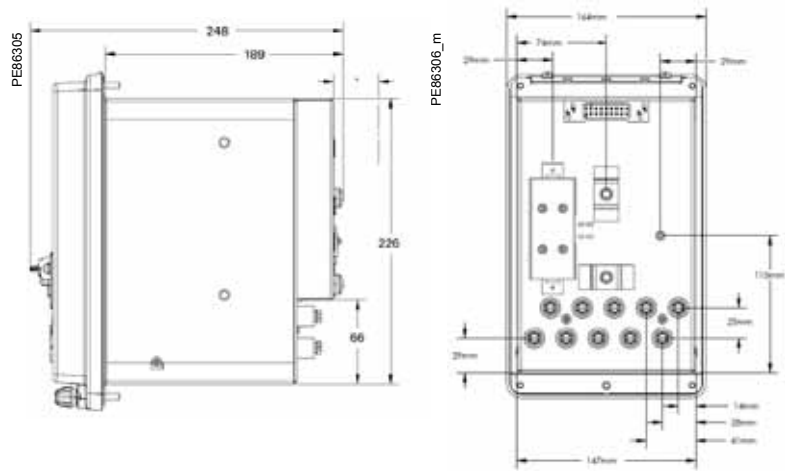


I/O Expander dimensions

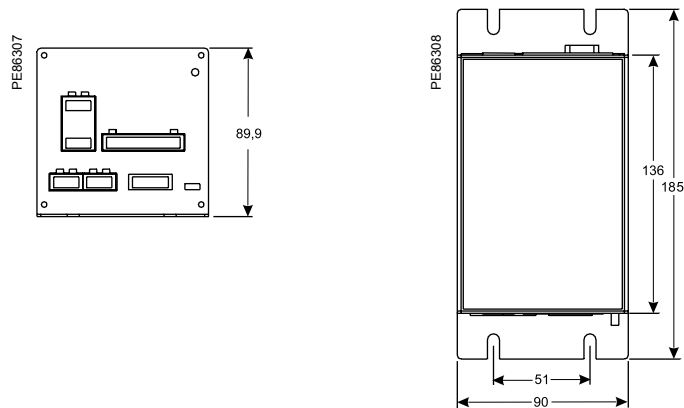


ION8650

Dimensions and connections (cont.)

ION8650 suggested switchboard mounting dimensions

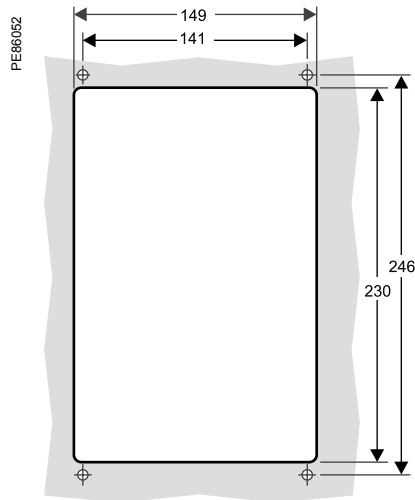

ION8650 switchboard mounting

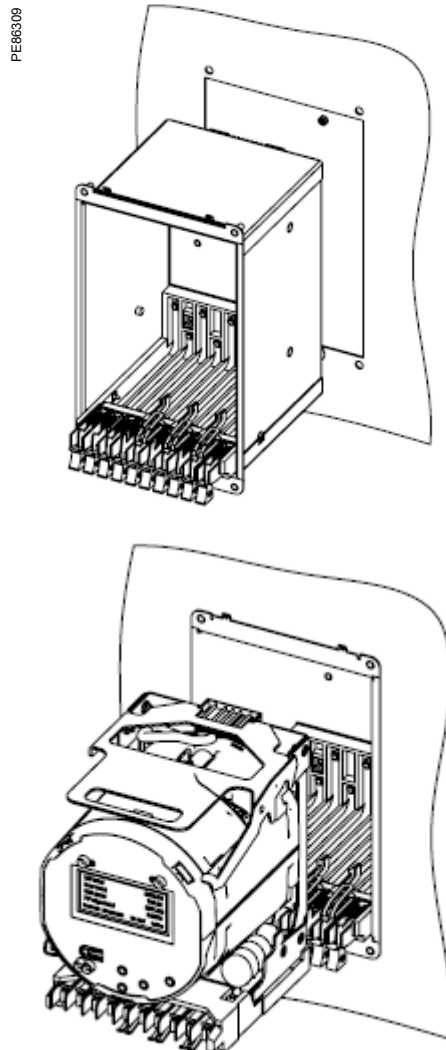

Please see appropriate Schneider Electric Install Guide for these products for further details.

Schneider Electric Industries SAS
35, Rue Joseph Monier,
CS 30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776
www.schneider-electric.com

ION8650 Power Meter
PLSED310027EN

As standards, specifications and designs develop from time to time, please ask for confirmation of the information given in this document.

Design: Schneider Electric
Photos: Schneider Electric

Over 75 % of Schneider Electric products
have been awarded the Green Premium ecolabel



© 2016 - Schneider Electric - All rights reserved

10-2016

Life Is On

Schneider
Electric